



MICROVAC


Diaphragm Pumps

Commitment to Quality

Applications

Salient Features

- No Lubrication required
- Low noise level
- Made of graded aluminium alloy casting
- Available in single or three phase
- Less weight easily portable
- Diaphragm available in Teflon,Viton etc.
- Maintenance free
- Available in PP,PVC,Teflon,SS for chemical resistance

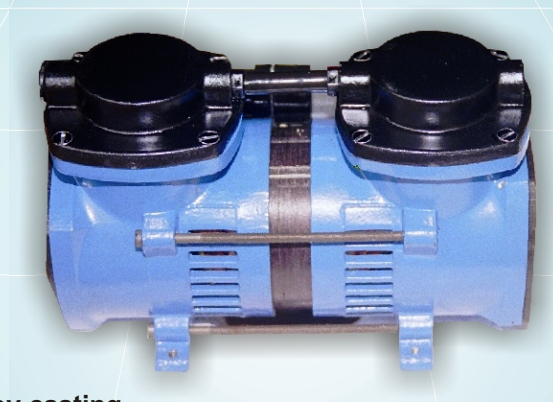

- Laboratories
- Material handling equipments
- Pollution control equipments
- Oil-free spray painting
- Labelling Machine
- Chemical Analyser
- Plastic Welding Machine
- Gas Welding Machine
- Glass Forming
- Medical Instruments
- Dentists
- Agitation

Specification

MODEL	Max.Flow Ltr/Min	Max.Vacuum Inches of Hg.	Max.Pressure Psi	Motor Hp.	Dimensions Approximately.
ME- 10	10	20	25	1/25	90x145x85
ME-15	15	22	25	1/20	175x110x150
ME-15(SM)	15	22	25	1/20	150x110x150
ME-15(FLP)	15	22	25	1/8	225x150x150
ME-25.S	15	26	30	1/16	210x125x125
ME-25.P	25	23	20	1/16	210x125x125
ME-25.C	15	22	25	1/16	210x150x125
ME-45	45	23	40	1/8	200x130x200
ME-45.C	28	22	10	1/8	235x130x200
ME-75.S	45	27	60	1/4	300x130x200
ME-75.P	75	23	40	1/4	300x130x200
ME-75.C	38	22	10	1/4	300x150x200

MICROVAC ENGINEERS

www.microvacpumps.com

Factory - C-6,HariBhakti Industrial Estate,Next to Spice Garden Hotel,
Old Ghodbunder Village Road, Mira Road (E),Dist. Thane - 401104

Contact - 022-28454502, 9322991600, 9821563746